


Part No.	(6)Length	Part No.	(6)Length
3181-0.5	0.5M	3181-5	5M
3181-1	1M	3181-10	10M
3181-2	2M	3181-15	15M
3181-3	3M	3181-30	30M

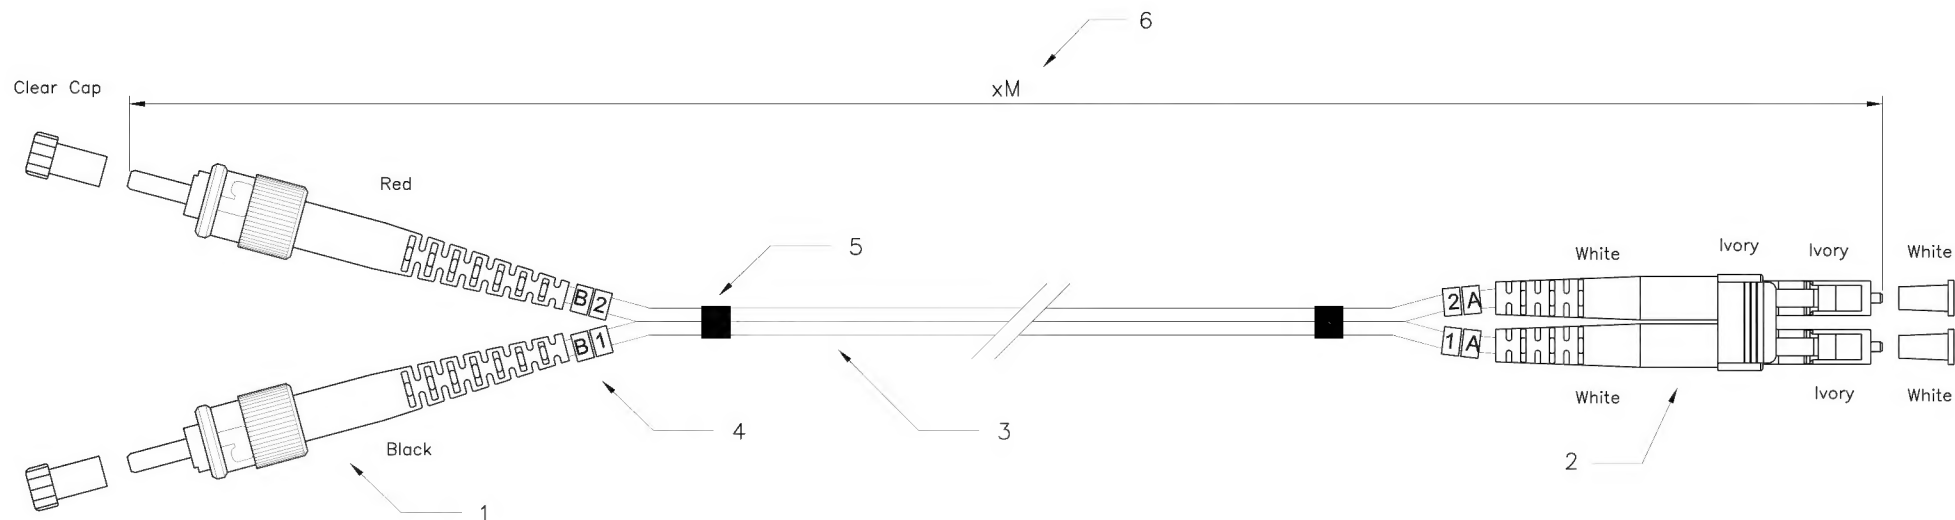


### Specification:

1. Connector Type : ST/PC Multimode
2. Connector Type : LC/PC Multimode
3. Cable Type :  
3-1 Zipcord cable,  $\varnothing 3.0\text{mm}$ , 62.5/125um Multimode  
3-2 Calbe Jacket : Gray color, LSZH material
4. Cable Marker
5. Shrink Tube
6. Length : xM

### Performance:

- a. Insertion Loss :  $< 0.5 \text{ dB}$
- b. Fiber Extention :  $-0.05\text{um} < H < +0.05\text{um}$
- c. Ferrule End-face Radius :  $7 < R < 25\text{mm}$
- d. Apex Offset :  $< 50\text{um}$
- e. Increase in insertion loss after 500 mating :  $0.2 \text{ dB Max.}$
- f. Operation Temperature :  $-20^{\circ} \text{ to } +70^{\circ}$
- g. Storage Temperature :  $-40^{\circ} \text{ to } +80^{\circ}$
- h. Humidity (non-condensing) 95%RH

**RoHS Compliant**

	DSGN	CSQ	30.MAY.2007	ITEM NO: 3181	
	CHK	Maer	30.MAY.2007		
	UNIT M/M	APPR	Yty	30.MAY.2007	ST to LC Duplex patch cord
	SCALE 1/1				
DWG NO: 3181	Videk Ltd				

**Videk Ltd**